

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ³ : G01C 9/06	A1	(11) International Publication Number: WO 82/ 0141 (43) International Publication Date: 29 April 1982 (29.04.82)
<p>(21) International Application Number: PCT/US80/01470</p> <p>(22) International Filing Date: 22 October 1980 (22.10.80)</p> <p>(71) Applicant (for all designated States except US): LEVEL-ING DEVICES, INC. [US/US]; 1001 Aurora Avenue, Aurora, IL 60507 (US).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): MCKENNA, William, F. [US/US]; 6113 Elm Avenue, Loves Park, IL 61111 (US). CWIENKALA, Gerry, A. [US/US]; 96 Browning Avenue, West Dundee, IL 60118 (US).</p> <p>(74) Agents: GILSTER, Peter, S. et al.; Kalish & Gilster, 818 Olive Street, Suite 1614, St. Louis, MO 63101 (US).</p>		<p>(81) Designated States: DE, DE (Auxiliary utility model), GB, LU, SE, US.</p> <p>Published With international search report. With amended claims and statement.</p>

(54) Title: LIFT TRUCK DIGITAL INCLINOMETER

(57) Abstract

Apparatus for digitally displaying inclination of a lift truck mast includes an inertial inclination sensor (A) carried by the mast (11) and a digital display module (B) for operator viewing remote from the mast. The inclination sensor includes a disc pendulum (27) pivoted for damping its movement, the disc having a wand (48) extending from it for exaggerated movement about the pivot. A plurality of light responsive devices (59) are provided for detecting the position of actual mast inclination with respect to a true vertical gravitational plumb line. A logic interconnected with these devices decodes signals resulting from a predetermined pattern of illumination on them produced by the wand (48) representative of the mast (11) inclination, providing an encoded signal which is converted to display drive signals for driving a plurality of digital display devices (76, 77, 79) of numeric readout, providing operator display of the actual degrees and increments of degrees of mast inclination from the vertical plumb line.

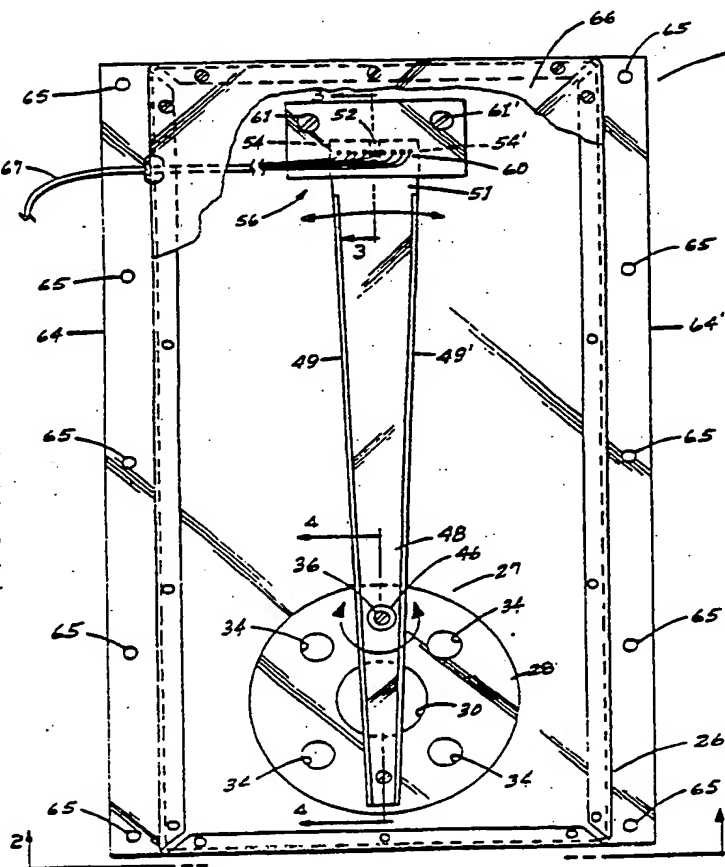

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	KP	Democratic People's Republic of Korea
AU	Australia	LI	Liechtenstein
BR	Brazil	LU	Luxembourg
CF	Central African Republic	MC	Monaco
CG	Congo	MG	Madagascar
CH	Switzerland	MW	Malawi
CM	Cameroon	NL	Netherlands
DE	Germany, Federal Republic of	NO	Norway
DK	Denmark	RO	Romania
FI	Finland	SE	Sweden
FR	France	SN	Senegal
GA	Gabon	SU	Soviet Union
GB	United Kingdom	TD	Chad
HU	Hungary	TG	Togo
JP	Japan	US	United States of America

-1-

LIFT TRUCK DIGITAL INCLINOMETER
BACKGROUND AND SUMMARY OF THE INVENTION

5 This invention relates to lift trucks and, more particularly, to a new system for providing a digital display of inclination of a lift truck mast from a vertical.

10 In the use of lift trucks, which typically have a mast having forks, a platen, or some other lifting device or devices for lifting a load, it is conventional to provide for operator control of inclination of the mast relative to vertical, thereby allowing the operator to adjust forward and backward tilt of the mast, for example. Front tilt may be required for picking up or depositing a load while rear tilt may be required for safe carrying of the load from one position to the other. It may be necessary also to control orientation of the load when picking up or depositing same.

15 In some specialized lift trucks, such as those used for glass handling wherein large sheets of glass must be transported from one place to another, it is very important to dispose the sheets of glass, as when they are being stacked, so that they are oriented very close to level. Otherwise, a stack of sheets varying even a few degrees from vertical will become unstable causing the lower sheets to slip out from the stack resulting in an extremely dangerous condition resulting in broken glass and setting serious life threatening potential. Stacking may be required to be level within $\pm 0.5^\circ$.



Although it has been proposed to provide an analog display of lift mast inclination, such as in the arrangements disclosed in Brudi U. S. Pat. No. 3,865,265 and Wilhelm U. S. Pat. No. 3,883,021, it is found that lift truck operator:
5 can more effectively provide accurate adjustment of the lift mast inclination, such as orienting it at precisely 0° inclination, if provided with a digital display of the inclination in degrees and increments of degrees. Also, analog arrangements have been prone to certain errors such as resulting from
10 aging of components, drift, out-of-tolerance conditions, offset errors and so forth.

A further problem which has plagued prior art inclinometers is proneness to swinging or oscillation of pendulums or other masses used to detect alignment. To reduce such
15 oscillation, it has been proposed, as in the above-identified patents, to use liquid damping of pendulums, etc., but this requires a complex sealing arrangement to prevent fluid leakage and consequent greater cost of manufacture.

It is an object of this invention to provide an
20 inclinometer for an apparatus, such as a vehicle, indicating orientation of structure of such apparatus with respect to vertical.

It is a further object of this invention to provide such an inclinometer which displays, preferably in digital
25 form, the degrees and increments of degrees of the orientation of a lift truck mast with respect to a true vertical gravitation plumb line for use by the lift truck operator for adjusting the orientation of the mast with respect to vertical.

A still further object of this invention is to provide
30 such a digital inclinometer which can provide precise, accurate and easily determinable alignment of a lift truck mast to control load orientation when picking up, depositing, or carrying same, and particularly, for precisely orienting the mast of a specialized lift truck used for glass handling.

35 Another object of the invention is the provision of such a digital inclinometer which is not prone to errors resulting from aging of components, drift, or out-of-tolerance conditions, offset errors, and so forth, providing at all times a precise digital display of mast inclination.

-3-

Another object of the invention is the provision of such a digital inclinometer utilizing a sensor which is not prone to oscillation and which is inherently self-damping.

5 A further object of the present invention is the provision of such a digital inclinometer which is constructed of an absolute minimum of mechanical and moving components, which utilizes relatively few simple, low cost optical sensing elements for sensing inclination and which provides solid state electronic conversion of the sensed inclination for use
10 in displaying the inclination digitally.

Other objects of the invention include the provision of such a digital inclinometer which is rugged and reliable in usage; which is relatively immune from damage due to vibration, shock, or acceleration; which provides reliable display of
15 inclination; and which gives to the operator automatic indication of any condition of excessive inclination which could not be electronically sensed and displayed.

Other objects and features will be in part apparent and in part pointed out hereinbelow.

20

BUREAU
OMPI
WIPO
INTERNATIONAL

BRIEF DESCRIPTION OF THE DRAWINGS

FIGURE 1 is a front elevation of a sensor module, depicting an enclosure of the module having a cover partly broken away, of a lift truck digital inclinometer constructed in accordance with and embodying the present invention.

FIGURE 2 is a top elevation of the sensor module of FIGURE 1.

FIGURE 3 is a vertical cross section taken along line 3--3 of FIGURE 1, showing a photosensor arrangement of the invention.

FIGURE 4 is a similar vertical cross section taken along line 4--4 of FIGURE 1, illustrating a pendulum of the sensor.

FIGURES 5-8 together constitute a schematic circuit diagram of certain photosensing, logic and display drive circuitry of the invention, interconnections between the various figures being shown by the alignment of leads.

FIGURE 9 is a side elevation of a conventional type of lift truck equipped with a digital inclinometer of the present invention.

FIGURE 10 is a side elevation of a specialized glass handling type of lift truck equipped with a digital inclinometer of the present invention.

Corresponding reference characters indicate corresponding elements throughout the several views of the drawings.

DESCRIPTION OF THE PREFERRED EMBODIMENT

Referring now by reference characters to the drawings, designated generally at A in FIGURE 1, and in FIGURES 9 and 10 is an inclination sensor module which is secured to the mast 11 of a lift truck. In FIGURE 10, lift truck designated generally at 12 is a conventional type of truck having a pair of lift forks 13 which are hydraulically or electrically controlled to be raised by mast 11 under control of an operator at an operating position or station 15. By use of conventional controls, mast 11 may be tilted forward or backward by the operator to a selected angle with respect to vertical, within a given range.

Module A is an insertial angle sensor adapted for sensing the actual inclination from a true vertical gravitational plumb line and, thus, determining verticality of the mast with respect to an imaginary line directed from sensor A to the center of gravity of the earth. The securement of module A to mast 11 as shown in FIGURE 9 is merely representative of various possible locations at which the module may be secured to structure of a lift truck or other vehicle.

In FIGURE 10, a specialized type of lift truck is designated generally at 17, being representative of the type of lift truck designated generally at 17, being representative of the type used for glass handling, i.e., for the transporting of packages of glass sheets by nestling of same against a pad upright support mechanism 18 carried by a lift or mast 19 comparable to mast 11 of lift truck 12. Mast 19 is selectively controllable by an operator standing upon a station or so-called bridge 21 constituting an operator station for control of the truck and its lift and handling mechanism as by controls 22. On bridge 21, the operator is provided with exceptional visibility of the load and surrounding work areas to assure safe, secure handling of the packages without glass damage. Mast 19 may selectively be tilted forward or backward by a hydraulic cylinder 24 under operator control 24.

-6-

In accordance with the invention, the operator is provided with a display module B, the circuitry of which is illustrated in FIGURES 5-8. Said module B provides a digital readout or display of the actual degrees and increments of degrees from the true vertical gravitational plumb line of the vehicle structure to which sensor module A is attached. Thus, in FIGURE 9, the inclination with respect to vertical of mast 11 is indicated to the operator at station 15. In FIGURE 10, module B displays the inclination of mast 19 to the operator on bridge 21.

Various possible specialized lift truck or other vehicular arrangements making use of the invention are envisioned but, in all proposed modes of usage, the digital inclinometer of the invention provides to the operator with a precise, accurate and easily determinable indication of the relative verticality of the structure to which sensor module A is attached. For example, this allows the operator of lift truck 17 to control load orientation when picking up, depositing, or carrying packages by permitting precise orientation of mast 19 by accurate presentation of the mast inclination in a digital form allowing the operator to easily understand and effectively utilize the mast inclination value displayed.

In this regard, it is found that the digital display is superior in glass handling to analog display since the operator can more readily determine whether the sheets of glass and packages of same are oriented by tilting of mast 19 within a predetermined tolerance which has been established as permissible such as within $\pm 0.5^\circ$ of vertical.

To this end, display module B is adapted for providing a plurality of digits for display of a range of inclination, thus indicating alignment in actual degrees and increments of degrees from a true vertical gravitational plumb line such as, for example, "+3.5°", "-1.5°", "+0.5°", "0.0°", up to a maximum range such as $\pm 8^\circ$ for the embodiment illustrated. But, it is to be understood that an inclinometer can be configured in accordance with the invention to provide for a greater range of sensing and display.

EUREX
C-TH
VLO
INTER

-7-

Referring again to FIGURE 1, sensor A comprises a suitable housing 26 for enclosing a pendulum 27 in the form of a flat disc 28. Disc 28 is pivoted by a ball bearing pivot 30 to provide a pivot axis transversely extending through the disc above its center. The pivot axis is thereby parallel to a line drawn perpendicularly to the plane of the disc and extending through the center of the disc, which is actually in the form of annulus by virtue of a large central aperture 30 therein.

In FIGURE 3, the center of the disc is shown by an axis 31 and the pivot axis being shown at 32. Also, for proper weighing and balancing of the disc, it may be provided with a plurality of apertures, as at 34, to selectively redistribute and reduce the mass of the disc.

Pivot 30 is defined by a mounting screw 36 carrying a sleeve 37 spaced from a rear wall 38 of enclosure 36 by a spacer 40. A sleeve 41 pressed into disc 28 rotates upon ball bearings 42 surrounding sleeve 37. Screw 36 may be threaded into a bore 44 of plate 38 but such is merely illustrative of various possible mounting arrangements.

Secured to disc 28 at its lower end by a screw 45 and a washer 46 under the head of screw 36 is a wand 48 formed of flat metal sheet material having outwardly directed flanges 49, 49' on opposite edges which diverge in the direction away from disc 28 to provide a disc remote upper end 51 of the wand free of said flanges 51 and having a notch 52 therein centered between side edges 54, 54'. These side edges are not flanged.

The distance from pivot 30 to the disc-remote end 51 of wand 48 is much greater than the diameter of disc 28 thereby providing exaggerated movement in response to the center of gravity of the disc (which coincides with its center) with respect to pivot axis 32. Said disc-remote wand end 51 control the incidence of light upon a plurality of light responsive devices which are, in accordance with the invention, illuminate by at least one light source, and, preferably, individual light sources, all as described shortly, forming part of a light sensor assembly designated generally at 56.

BUREAU
OF
INVENTIONS

-8-

Oscillation of disc 28 and wand end 51 is substantially minimized since pivot axis 32 is located analytically with respect to disc center or axis 31 for yielding a relatively rapid harmonic motion, i.e., shortest period of oscillation. Bearing friction of pivot 32, though very small, also helps dampen oscillations without interfering with accuracy. Other oscillation damping can be employed, e.g., by use of magnets, such as located proximate wand 48.

Assembly 56 comprises first and second boards 57, 58 which may be of phenolic, epoxy, or other resin materials used, for example, for making printed circuit boards (PCB's). On one of said boards 57 is positioned a linear array 59 of individual phototransistors which are spaced evenly across the board. On the opposite board 57 is located a corresponding linear array 60 of light-emitting diodes (LED's). Arrays 59, 60 are transversely aligned with respect to wand 48 in parallel relationship to pivot axis 32 whereby slot 52 will allow light from one of the LED's to be directed upon its corresponding phototransistor throughout the range of movement of wand 48 about pivot axis 32 in accordance with the inclination of housing 26 to the true vertical gravitational plumb line defined by disc 28 as it is attracted to the mass of the earth.

In accordance with this invention, the width of slot or aperture 52 is precisely selected to be substantially or slightly greater than the spacing between adjacent phototransistors so that it will permit illumination of only one phototransistor by its corresponding LED being thus chosen to be substantially the same as the spacing between the phototransistors of the array. Also, the width of the disc-remote portion 51 is precisely selected so that its side edges 54, 54' permit successive phototransistors to be illuminated upon movement of wand 48 about the pivot axis, all as more fully described hereinbelow.

Boards 57, 58 are maintained in position on opposite faces of wand end 51 by a pair of screws 61, 61' and spacers 62, 63. The screws are threaded into the rear wall or plate 38.

Enclosure 26 is provided, merely representatively of one possible construction, with flanges 64, 64' which are apertured, as at 65, to permit securement to housing 26 as

LUREA
CMTI

-9-

by machine screws to the mast of a lift truck. Preferably, also the entire pendulum and light sensor assembly is rendered accessible by a cover plate 66 of enclosure 26. Extending from housing 26 is a cable 67 including leads interconnected with the LED's and phototransistors and connecting module A with module B.

Although there could be located within housing 26 all of the circuitry necessary for providing signals for driving a numeric display of module B, it is preferred instead that substantially all such circuitry be located within housing B.

Circuitry of the invention is illustrated schematically in FIGURES 5-8. Referring to FIGURE 5, the light sensor assembly 56 circuit of phototransistor array 59 has nine phototransistors P1-P9. These are each adapted to be illuminated by a corresponding one of nine LED's D1-D9 each having its anode tied to ground and its cathode supplied through a corresponding one of resistors R1-R9 with suitable voltage, such as 5 v.d.c. from a power supply having an integrated circuit regulator 69 to which standard vehicle voltage, such as 12 v. is provided. Filter capacitors C1 and C2 are connected across the input and output of regulator 69. Its +5 v.d.c. output is made available also to logic circuitry of the system but for simplicity and clarity not all power supply connections are illustrated.

The emitter of each of phototransistors P1-P9 is connected to the circuit ground, the collector being connected to a respective one of nine logic inverting gates or buffers G1-G9. The output of each of gates G1-G9 are interconnected with a respective one of buses L1-L9 (FIGURES 6 and 7) serving as inputs for a logic circuitry including logic AND gates G11-G64 logic inverting (NOT) gates G66-G70, and logic NOR (AND NOT) gates G72-G78. This logic circuitry decodes signals present on leads L1-L9 to provide corresponding binary coded decimal (BCD) signals on a plurality of output buses L11-L15 (FIGURE 6) and L16 (FIGURE 7) via diodes D11-D73 which serve as OR gates to encode signals on leads L11-L16. Having inputs connected to leads L11-L17 are integrated circuits 72, 72' each of which may be a commercially available type of BCD-to-7-segment converter for providing on their collective outputs

BUT

C

-10-

74, 75 drive signals through current limiting resistors for driving respective 7-segment numeric displays 76, 77, such as of the LED, fluorescent, plasma, or incandescent types.

5 Display 76, preferably, shows the number of degrees of inclination and display 77 the increments of degrees such as tenths of degrees. A polarity display 79 indicates either a positive or negative sign for revealing whether the mast is tilted forward or rearward, if other than at zero in-
10 clination.

 Buses L11-L17 are connected with the BCD inputs of circuits 72, 73 through drivers or buffers G80-G84. Similar drivers G86-G87 provide signals on buses L11 and L17 to logic
15 inverting (NOT) gates G89, G90 which have outputs connected through current limiting resistors to the polarity display
 79. For polarity determination, the odd numbered diodes, viz., diodes D47, D49, D51, etc. all have their cathodes interconnected with the anode of a diode D83 whose
 cathode is in turn connected to bus L11.

20 As previously observed, slot 52 provides illumination by one LED of a single phototransistor P5 when wand 48 is centered with respect to array 56 corresponding to a position of disc 28 which exists in a condition of zero
 degrees of inclination. Note that this condition is such
25 that a line drawn from the center of slot 52 through pivot axis 32 and will intersect the beam of light between LED D5 and phototransistor P5. Because the width of slot
 52 is substantially precisely the same as the spacing between the individual phototransistors, a movement of the
30 wand corresponding to a half of the width of the slot in either direction will permit the adjacent phototransistor to be illuminated. Thus, if wand end 51 moves to the right by rotation about pivot axis 32 in an amount corresponding to one half slot width, the adjacent phototransistor P6
35 will be illuminated with P5. A successive half slot increase in the angle will prevent illumination of P5 and provide illumination only of P6. Furthermore, the width of remote end 51, i.e., the dimension between its edges 54, 54', is

EURE

-11-

such that when slot 52 provides illumination of the center phototransistor P5 and either phototransistor (P4 or P6) on either side, the corresponding edge 54, 54' permitting the illumination of the corresponding other end photocell (P1 or P9) of the array. Each phototransistor when illuminated may be said to be conductive or "on". Thus, if slot 52 permits P5 and P6 to be on, then P1 will also be on. If then wand end 51 moves another half slot width to the right, P1 will remain on with P6, but light will be blocked by the left edge of slot 52 from P5, so that only P1 and P6 are on. With subsequent further half slot movement to the right, P6 and P7 will be illuminated together with P2, and so on.

Therefore, it is to be understood that the phototransistors P1-P9 are each at all times either on or off, depending upon whether the slot 52 and either edge 54, 54' of wand end 51 will permit illumination of same. This permits the use of nine photocells to measure an included angle of 18° (which as noted will provide a display of $\pm 8^\circ$) in degrees and 5/10ths of degrees. Accordingly, the dimensions of wand 48 are chosen to provide spacing of the photocells of array 59 in 1° increments and the width of slot 52 corresponds to 1° of rotation about axis 32. It follows that a rotation of wand 48 by $4\frac{1}{2}^\circ$ about axis 32 will provide positioning of slot 52 for uncovering the last element (P1 or P9) of array 59. In such position, the corresponding side edge, 54, 54' would be aligned with the last element (P9 or P1) of the array and the opposite side edge would be uncovering the center phototransistor P5. In effect, slot 52 measures half degree increments. But, with increase in movement beyond $4\frac{1}{2}^\circ$, the wand would continue to cover remaining elements in array, such as P6, P7, P8, and P9 for measurement in terms of 1° increments.

In effect, the phototransistor array 59 is used to encode the position of wand 48. In so doing, phototransistors P1-P9 provide signals on buses L1-L9 constituted by a voltage

BUREAU
OF
INTELLIGENCE

-12-

on the respective bus when the corresponding photocell is on. Table I summarizes the decoding of these signals by the various logic gates of the circuitry of FIGURES 6 and 7.

5 Table II summarizes the signals developed by logic gates of the circuitry of FIGURES 6 and 7, which signals represent the decoding of inputs provided by array 59 expressed in terms of degrees of inclination, as represented by the signal present at the output of each gate identified
10 in Table II.

Diodes D11-D73 provide these output signals upon buses L11-L17 so that there result BCD signals on these buses.

For example, if photocells P3-P9 are on, there would
15 result at the output of gate G63 a signal corresponding to +7° of inclination. Diodes D73-D76 would cause a logic high or "1" to be present on buses L17, L13, L14, and L15 which, through the drivers G80-G84, etc., provide BCD inputs to circuits 72, 73 representing the BCD
20 values "1", "2", and "3" which sum to "7". Circuit 72 causes the numeral "7" to be displayed by display device 76. Also, the signals present on buses L11, L17 cause polarity display 79 to indicate "+".

It is, thus, seen that diodes D11-D73 constitute
25 means for converting the decoded inclination values to BCD format, thereby encoding the inclination in BCD values.

BUREAU
CHIFFRE
1/1

-13-

TABLE I

	<u>GATE</u>	<u>LOGIC OUTPUT</u>
	G11	1•6
	G12	1•5•6
5	G17	1•2•6•7
	G18	1•2•7
	G20	1•2•3
	G21	1•2•3•7•8
	G24	1•2•3•4•8•9
10	G25	1•2•3•4
	G26	1•2•3•4•9
	G31	1•2•3•4•5•9
	G32	1•2•3•4•5
	G33	1•2•3•4•5•6
15	G35	1•2•3•4•5•6•7
	G38	4•5•9
	G39	4•9
	G42	3•4•8•9
	G45	3•8•9
20	G46	2•3•7•8•9
	G51	1•2•6•7•8•9
	G52	7•8•9
	G53	1•6•7•8•9
	G57	5•6
25	G58	5•6•7•8•9
	G60	4•5•6•7•8•9

-14-

TABLE II

	<u>GATE</u>	<u>INCLINATION VALUE REPRESENTED BY OUTPUT</u>
	G13	-1.0
5	G14	-0.5
	G15	-1.5
	G16	-2.0
	G22	-2.5
	G23	-3.0
10	G24	-3.5
	G29	-4.0
	G31	-4.5
	G30	-5.0
	G34	-6.0
15	G36	-7.0
	G37	-8.0
	G40	+0.5
	G41	+1.0
	G43	+1.5
20	G44	+2.0
	G47	+2.5
	G48	+3.0
	G51	+3.5
	G54	+4.0
25	G56	+4.5
	G59	+5.0
	G61	+6.0
	G63	+7.0
	G64	+8.0

-15-

In Table I, the heading "Gate" indicates that logic element or gate of FIGURES 6 and 7 providing logic operation upon the signals present on buses L1-L9 (which correspond to the phototransistors P1-P9). The heading "Logic Output" indicates the nature of the output signal provided at the output of the respective gate as a function of the signals present on buses L1-L9 as signified by the numerals one through nine.

These logic outputs are effectively provided by the diode array consisting of diodes D11-D73 to buses L11-L17 as encoded BCD signals for providing digital representation of the inclination measured by sensor A. These BCD signals are then converted to drive signals at the outputs 74, 75 of circuits 72, 73 to cause proper energization of the display devices 76, 77. Also, the polarity signals present on buses L11-L17 similarly are provided to polarity display 79, being logically inverted by gates G89, G90 for proper operation. The common cathodes of each of display devices 76, 77, and 79 are tied together by a common lead 81 which is connected through the collector-emitter circuit of a transistor 82 for controlling the availability of the + 5 v.d.c. supply potential requisite for operation of these devices and which potential is made available by a terminal 83 connected to the power supply previously described. A resistor R11 connects the base of transistor 82 to a further AND gate G92 which receives as its inputs the output of gate G64 and the signal present on bus L1. This arrangement provides means for causing the display to provide an overrange indication if the vehicle structure to which sensor A is secured is inclined with respect to the vertical plumb line to a predetermined extent preventing the logic circuitry from providing proper digital encoding or conversion of the signals provided by phototransistors P1-P9, i.e., which may result if the end 51 of wand 48 should be displaced by an amount preventing array 59 from properly encoding the wand position. In operation, the overrange circuitry, by causing transistor 82 to become nonconductive, interrupts the supply potential for blanking display devices 76, 77, and 79. In this way, the operator is provided with an overrange signal permitting him to position the lift truck mast, for example, more closely to

-16-

vertical at which time the digital display will again be resumed.

It is noted that CMOS devices may be utilized in constructing logic circuitry of the invention. For this reason, resistors R13-R18 provide connection of individual ones of buses L12-L16 to the circuit ground so that a logical low state will exist for the cathodes of the diodes D11-D73 for proper driving operation by buffers G80-G94, etc. A single resistor R19 provides the same function for bus L11 (FIGURE 6).

Accordingly, it will be seen that several objects of the invention are attained and various other advantages also result.

Although the foregoing includes a description of the best mode contemplated for carrying out the invention, various modifications are contemplated.

As various modifications could be made in the constructions herein described and illustrated without departing from the scope of the invention, it is intended that all matter contained in the foregoing description or shown in the accompanying drawings shall be interpreted as illustrative rather than limiting.

BUREAU
CIVIL
11-11-82

-17-

WHAT IS CLAIMED IS:

1. Apparatus for displaying inclination from vertical of structure such as that of a lift truck or other vehicle structure, said apparatus comprising an inclination sensor module carried by said structure and an inclination display module remote from said structure for displaying to an operator the inclination of said structure, and characterized by said sensor module including a mass pivotally secured with respect to said structure for inertially establishing a true vertical gravitational plumb line, means for detecting the position of said mass relative to said structure, means for converting the detected position to electronic signals to produce encoded signals, said display module comprising a display device responsive to said encoded signals providing display of the actual degrees and increments of degrees of inclination of said structure referenced to said vertical plumb line.

2. Apparatus for providing a digital display of the inclination from vertical of a lift truck or other vehicular structure, said apparatus comprising an inclination sensor module carried by said structure and a digital display module remote from said structure for digitally displaying to an operator the inclination of said structure, and characterized by said sensor module including a mass pivotally secured with respect to said structure for inertially establishing a true vertical gravitational plumb line, means for optically detecting the position of said mass relative to said structure, means for converting the optically detected position to electronic position signals, means for decoding said electronic position signals to produce encoded signals, said display module comprising a digital display device responsive to said encoded signals providing display of the actual degrees and increments of degrees of inclination of said structure referenced to said vertical plumb line.

-18-

3. Apparatus according to Claim 2 and further comprising means providing pivotal securement of said mass for pivotal movement relative to said structure about a pivot axis in response to inclination of said structure.

4. Apparatus according to Claim 3 and further characterized by said pivot axis extending through said mass in perpendicular relationship to a plane defined by said mass.

5. Apparatus according to Claim 4 and further characterized by said mass comprising disc, said pivot axis being located analytically in spaced relationship to the center of said disc by a dimension less than the radius of said disc for yielding a relatively rapid harmonic motion of said disc, thereby tending to minimize the total period of oscillation.

6. Apparatus according to Claim 3 and further characterized by said mass having a wand extending therefrom including a mass-remote end providing exaggerated movement upon rotation of said mass relative about said pivot axis, said means for optically detecting the position of said mass comprising an array of photosensitive devices positioned relative to said mass-remote wand end for detecting the position thereof relative to said structure, and means for illuminating said devices as a function of the position of said wand end.

7. Apparatus according to Claim 6 and further characterized by said sensor module comprising a substantially closed enclosure containing said disc, wand, and array of photosensitive devices.

8. Apparatus according to Claim 6 and further characterized by said array of photosensitive devices comprising a linear array of individual light responsive switching devices, said illuminating means comprising a linear array of LED's transversely aligned with said light responsive switching devices, said wand end being movable about said pivot axis between said arrays for controlling the incidence of light from said LED's upon corresponding ones of said light responsive switching devices to produce electronic position signals from said switching devices.

10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2

-19-

9. Apparatus according to Claim 7 and further characterized by said light responsive switching devices comprising phototransistors and being less in number than the total number of degrees and increments of degrees of inclination to be displayed.

10. Apparatus according to Claim 9 and further characterized by said wand having a light blocking portion having side edges and width between said side edges sufficient for blocking light from all of said LED's to all said phototransistors for zero inclination of said structure, said portion having a centrally located aperture permitting illumination of a center one of said phototransistors, said aperture and side edges sequentially permitting incidence of light from the LED's on corresponding phototransistors upon position change of said wand end with respect to said array.

11. Apparatus according to Claim 10 and further characterized by said aperture having a width in the direction of movement at least substantially equal to or slightly greater than the spacing between each of said phototransistors.

12. Apparatus according to Claim 11 and further characterized by said phototransistors being spaced apart by a distance corresponding to movement of said wand aperture through one degree of rotation about said pivot axis, said width of the wand end being such that rotation of said wand through one-half degree of rotation about said pivot axis from zero inclination will cause illumination of an adjacent phototransistor at the end of said array.

13. Apparatus according to Claim 6 and further characterized by said means for converting optically detected position to electronic position signals comprising circuitry interconnected with said light responsive switching devices for producing voltages corresponding to conductive and nonconductive states of said devices, said decoding means comprising logic circuitry including a plurality of logic gates for providing outputs which are a logical function of said conductive and nonconductive states.

BUREAU
C. T. I.

-20-

14. Apparatus according to Claim 13 and further characterized by said logic gates providing inclination output signals representing values of said inclination expressed in degrees and increments of degrees to produce
5 said encoded signals.

15. Apparatus according to Claim 14 and further characterized by said logic circuitry comprising means for converting said inclination output signals to BCD encoded signals.

16. Apparatus according to Claim 15 and further characterized by said display devices comprising 7-segment devices and further comprising BCD-to-7-segment converting means for causing display by said display devices in
5 accordance with said BCD encoded signals.

17. Apparatus for providing a digital display of the actual degrees and increments of degrees of inclination from a true vertical gravitational plumb line of a lift truck mast, said apparatus comprising an inclination sensor
5 module carried by said mast and a display module remote from said mast for providing said digital display to an operator, and characterized by said inclination sensor module including an enclosure adapted for securement to said mast, a pendulum positioned within said enclosure, said pendulum comprising a
10 mass, a pivot defining a pivot axis extending through said mass for permitting swinging within said enclosure upon inclination of said mast from said vertical plumb line, said pivot axis being spaced from the center of said mass whereby a part of said mass is located above said pivot axis and a
15 part of said mass is located below said pivot axis, and such that the center of gravity of said mass is located beneath said pivot axis, a wand extending from said mass and having mass-remote end providing exaggerated movement in response to movement of the center of gravity of said mass with respect
20 to said pivot axis, a plurality of light responsive devices positioned with respect to the mass-remote end of said wand for detecting the position of said wand, said light responsive

BUREAU
CHIEF

-21-

25 devices being fewer in number than the number of degrees and
increments of degrees to be displayed, at least one light
source for providing illumination for being received by
said light responsive devices, said mass-remote end of said
wand being configured to cause different ones of said light
responsive devices to be illuminated in a predetermined
30 pattern in response to pivoting of said mass about said pivot
axis upon increase in the degree of inclination of said mast
from said vertical plumb line, circuit means interconnected
with said light responsive devices for providing decoding of
signals from said light responsive devices resulting from said
predetermined pattern of illumination to produce an encoded
35 signal representative of the actual inclination of said
vertical mast from said vertical plumb line, said display
module comprising a plurality of digital display devices
defining a numeric readout having a plurality of digits for
indicating said actual degrees and increments of degrees of
40 inclination, and means for converting said encoded signal to
display drive signals for driving said display devices thereby
to cause display by said digital readout by the actual degrees
and increments of degrees of inclination of said mast from
said vertical plumb line.

18. Apparatus as set forth in Claim 17 and further
characterized by means for causing said display to provide
an overrange indication if said mast is inclined with respect
to said vertical plumb line to a predetermined extent pre-
5 venting said circuit means from properly digitally encoding
said signals from said light responsive devices.

19. Apparatus as set forth in Claim 17 and further
characterized by said mass defining a plane, said pivot
axis extending through said mass in perpendicular relation-
ship to said plane, said mass inertially establishing said tru
5 vertical gravitational plumb line.

BURBA
CMT
VLS

-22-

20. Apparatus as set forth in Claim 19 and further characterized by said mass comprising a disc, said pivot axis being located analytically in spaced relationship to the center of said disc by a dimension less than the radius of said disc for yielding a relatively rapid harmonic motion of said disc thereby to substantially minimize the total period of oscillation.

21. Apparatus as set forth in Claim 17 and further characterized by said enclosure containing said mass, said wand, said light responsive devices, said light source, and said apparatus comprising a further enclosure constituting said display module and containing said circuit means and said digital display devices, said further enclosure being located at an operator station of said lift truck.

BUREAU
CIGI

AMENDED CLAIMS

(received by the International Bureau on 22 October 1981 (22.10.81))

1. Apparatus for displaying inclination from vertical of a lift truck mast or other vehicle structure, said apparatus comprising an inclination sensor module carried by said mast and an inclination display module remote from said mast for displaying to an operator the inclination of said mast, and characterized by said sensor module including a mass for inertially establishing a true vertical gravitational plumb line, means for pivotally securing said mass by providing a pivot axis extending through said mass for permitting pivoted movement thereof with respect to said mast with a minimized total period of oscillation, means for optically detecting the position of said mass relative to said mast, and means for converting the optically detected position to electronic signals to produce encoded signals, said display module comprising a display device responsive to said encoded signals providing display of the actual degrees and increments of degrees of inclination of said mast referenced to said vertical plumb line.

2. Apparatus for providing a digital display of the inclination from vertical of a lift truck mast or other vehicular structure, said apparatus comprising an inclination sensor module carried by said mast and a digital display module remote from said mast for digitally displaying to an operator the inclination of said mast, and characterized by said sensor module including a mass for inertially establishing a true vertical gravitational plumb line, means for pivotally securing said mass by providing a pivot axis extending through said mass for permitting pivoted movement thereof with respect to said mast with a minimized total period of oscillation, said pivot axis extending through said mass, means including an array of photosensitive devices for optically detecting the position of said mass relative to said mast, circuit means interconnected with said photosensitive devices for converting the optically detected position to coded electronic position signals, means

for converting said electronic position signals by decoding thereof to produce encoded signals, said display module comprising a digital display device responsive to said encoded signals providing display of the actual degrees and increments of degrees of inclination of said mast referenced to said vertical plumb line.

3. Apparatus according to Claim 2 and further characterized by said pivot axis extending through said mass in perpendicular relationship to a plane defined by said mass, said mass comprising disc, said pivot axis being located analytically in spaced relationship to the center of said disc by a dimension less than the radius of said disc for yielding a relatively rapid harmonic motion of said disc, thereby tending to minimize the total period of oscillation.

4. Apparatus according to Claim 3 and further characterized by said mass having a wand extending therefrom including a mass-remote end providing exaggerated movement upon rotation of said mass relative about said pivot axis, said means for optically detecting the position of said mass comprising an array of photosensitive devices positioned relative to said mass-remote wand end for detecting the position thereof relative to said mast, and means for illuminating said devices as a function of the position of said wand end.

5. Apparatus according to Claim 4 and further characterized by said sensor module comprising a substantially closed enclosure containing said disc, wand, and array of photosensitive devices.

6. Apparatus according to Claim 4 and further characterized by said array of photosensitive devices comprising a linear array of individual light responsive switching devices, said illuminating means comprising a linear array of LED's transversely aligned with said light responsive switching devices, said wand end being movable about said pivot axis between said arrays for controlling the incidence of light from said LED's upon corresponding ones of said light responsive switching devices to produce electronic position signals from

said switching devices, said light responsive switching devices comprising phototransistors and being less in number than the total number of degrees and increments of degrees of inclination to be displayed.

5 7. Apparatus according to Claim 6 and further characterized by said wand having a light blocking portion having side edges and width between said side edges sufficient for blocking light from all of said LED's to all said phototransistors for zero inclination of said mast, said portion
10 having a centrally located aperture permitting illumination of a center one of said phototransistors, said aperture and side edges sequentially permitting incidence of light from the LED's on corresponding phototransistors upon position change of said wand end with respect to said array, said
15 aperture having a width in the direction of movement at least substantially equal to or slightly greater than the spacing between each of said phototransistors.

8. Apparatus according to Claim 7 and further characterized by said phototransistors being spaced apart by
20 a distance corresponding to movement of said wand aperture through one degree of rotation about said pivot axis, said width of the wand end being such that rotation of said wand through one-half degree of rotation about said pivot axis from zero inclination will cause illumination of an adjacent
25 phototransistor at the end of said array.

9. Apparatus according to Claim 6 and further characterized by said means for converting optically detected position to electronic position signals comprising circuitry interconnected with said light responsive switching
30 devices for producing voltages corresponding to conductive and nonconductive states of said devices, said decoding means comprising logic circuitry including a plurality of logic gates for providing outputs which are a logical function of said conductive and nonconductive states.

10. Apparatus according to Claim 9 and further characterized by said logic gates providing inclination output signals representing values of said inclination expressed in degrees and increments of degrees to produce said encoded signals, said logic circuitry comprising means for converting said inclination output signals to BCD encoded signals, said display devices comprising 7-segment devices and further comprising BCD-to-7-segment converting means for causing display by said display device in accordance with said BCD encoded signals.

11. Apparatus for providing a digital display of the actual degrees and increments of degrees of inclination from a true vertical gravitational plumb line of a lift truck mast, said apparatus comprising an inclination sensor module carried by said mast and a display module remote from said mast for providing said digital display to an operator, and characterized by said inclination sensor module including an enclosure adapted for securement to said mast, a pendulum positioned within said enclosure, said pendulum comprising a mass in the form of a disc, a pivot defining a pivot axis extending through said disc for permitting swinging within said enclosure upon inclination of said mast from said true vertical gravitational plumb line, the center of gravity of said disc being located beneath said pivot axis, said disc defining a plane, said pivot axis extending through said disc in perpendicular relationship to said plane, said disc inertially establishing by rotation about said pivot axis said true vertical gravitational plumb line, said pivot axis being located analytically in spaced relationship to the center of said disc by a dimension less than the radius of said disc for yielding a relatively rapid harmonic motion of said disc thereby to substantially minimize the total period of oscillation, a wand extending from said disc and having mass-remote end providing exaggerated movement in response to movement of the center of gravity of said mass with respect to said pivot axis, a plurality of light responsive devices positioned with respect to the mass-remote end of said wand for detecting the position of said wand, said light responsive devices being fewer in number

than the number of degrees and increments of degrees to be displayed, at least one light source for providing illumination for being received by said light responsive devices, said mass-remote end of said wand being configured to cause different ones of said light responsive devices to be illuminated in a predetermined pattern in response to pivoting of said mass about said pivot axis upon increase in the degree of inclination of said mast from said true vertical gravitational plumb line, circuit means interconnected with said light responsive devices for providing decoding of signals from said light responsive devices resulting from said predetermined pattern of illumination to produce an encoded signal representative of the actual inclination of said vertical mast from said true vertical gravitational plumb line, said display module comprising a plurality of digital display devices defining a numeric readout having a plurality of digits for indicating said actual degrees and increments of degrees of inclination, and means for converting said encoded signal to display drive signals for driving said display devices thereby to cause display by said digital readout by the actual degrees and increments of degrees of inclination of said mast from said true vertical gravitational plumb line.

12. Apparatus as set forth in Claim 11 and further characterized by means for causing said display to provide an overrange indication if said mast is inclined with respect to said vertical plumb line to a predetermined extent preventing said circuit means from properly digitally encoding said signals from said light responsive devices.

13. Apparatus as set forth in Claim 11 and further characterized by said enclosure containing said disc, said wand, said light responsive devices, said light source, and said apparatus comprising a further enclosure constituting said display module and containing said circuit means and said digital display devices, said further enclosure being located at an operator station of said lift truck.

STATEMENT UNDER ARTICLE 19

Original sheet 17 has been replaced by new sheet 17 on
10 which Claim 1 has been amended to clarify the claimed invention
and to emphasize the aspect of the mass for inertially esta-
blishing a plumb line being pivotally secured by an arrangement
wherein the pivot axis extends through the mass for permitting
15 pivoted movement thereof with respect to the lift truck mast
with minimized total period of oscillation.

Claim 2 on replacement sheet 17 has also been amended,
again emphasizing the aspect of the pivotal securement of
the mass as above noted and with certain other clarifying
amendments.

20 On replacement sheet 18, there now appear Claims 3
through 5 and a portion of Claim 6. Claim 3 is, in essence,
original Claims 4 and 5 combined, while new Claims 4, 5 and
6 are respectively old Claims 6, 7 and 8. Original Claim 3
has been cancelled. It is noted that new Claim 6 constitutes
25 the combination of original Claims 8 and 9.

On replacement sheet 19, new Claim 7 represents the
combination of original Claims 10 and 11, with minor
clarifying amendment. New Claims 8 and 9 are respectively
original Claims 12 and 13.

30 On replacement sheet 20, new Claim 10 represents the
combining of original Claims 14-16.



New Claim 11 on replacement sheet 20 is original Claim 17 but substantially amended to set forth features recited in original Claims 19 and 20, emphasizing the feature of the mass being in the form of a disc with a specifically claimed pivotal securement thereof for yielding a relatively rapid harmonic motion of the disc to substantially minimize the total period of oscillation.

On replacement sheet 21, Claims 12 and 13 are respectively original Claims 18 and 21. It is noted that original Claims 19 and 20 have been eliminated in view of the amendment represented by Claim 11.

Thus, Claims 1-13 are now pending in the application, replacing original Claims 1 through 21. These new claims are now set forth on replacement pages 17 through 21 which replace original pages 17 through 22. Accordingly, the abstract of the disclosure should appear now as sheet 23 of the above application.

These amendments have been made to clarify and emphasize the novel aspects of applicant's advantageous invention and to simplify the issues by clarifying certain expressions and by reducing the number of claims.



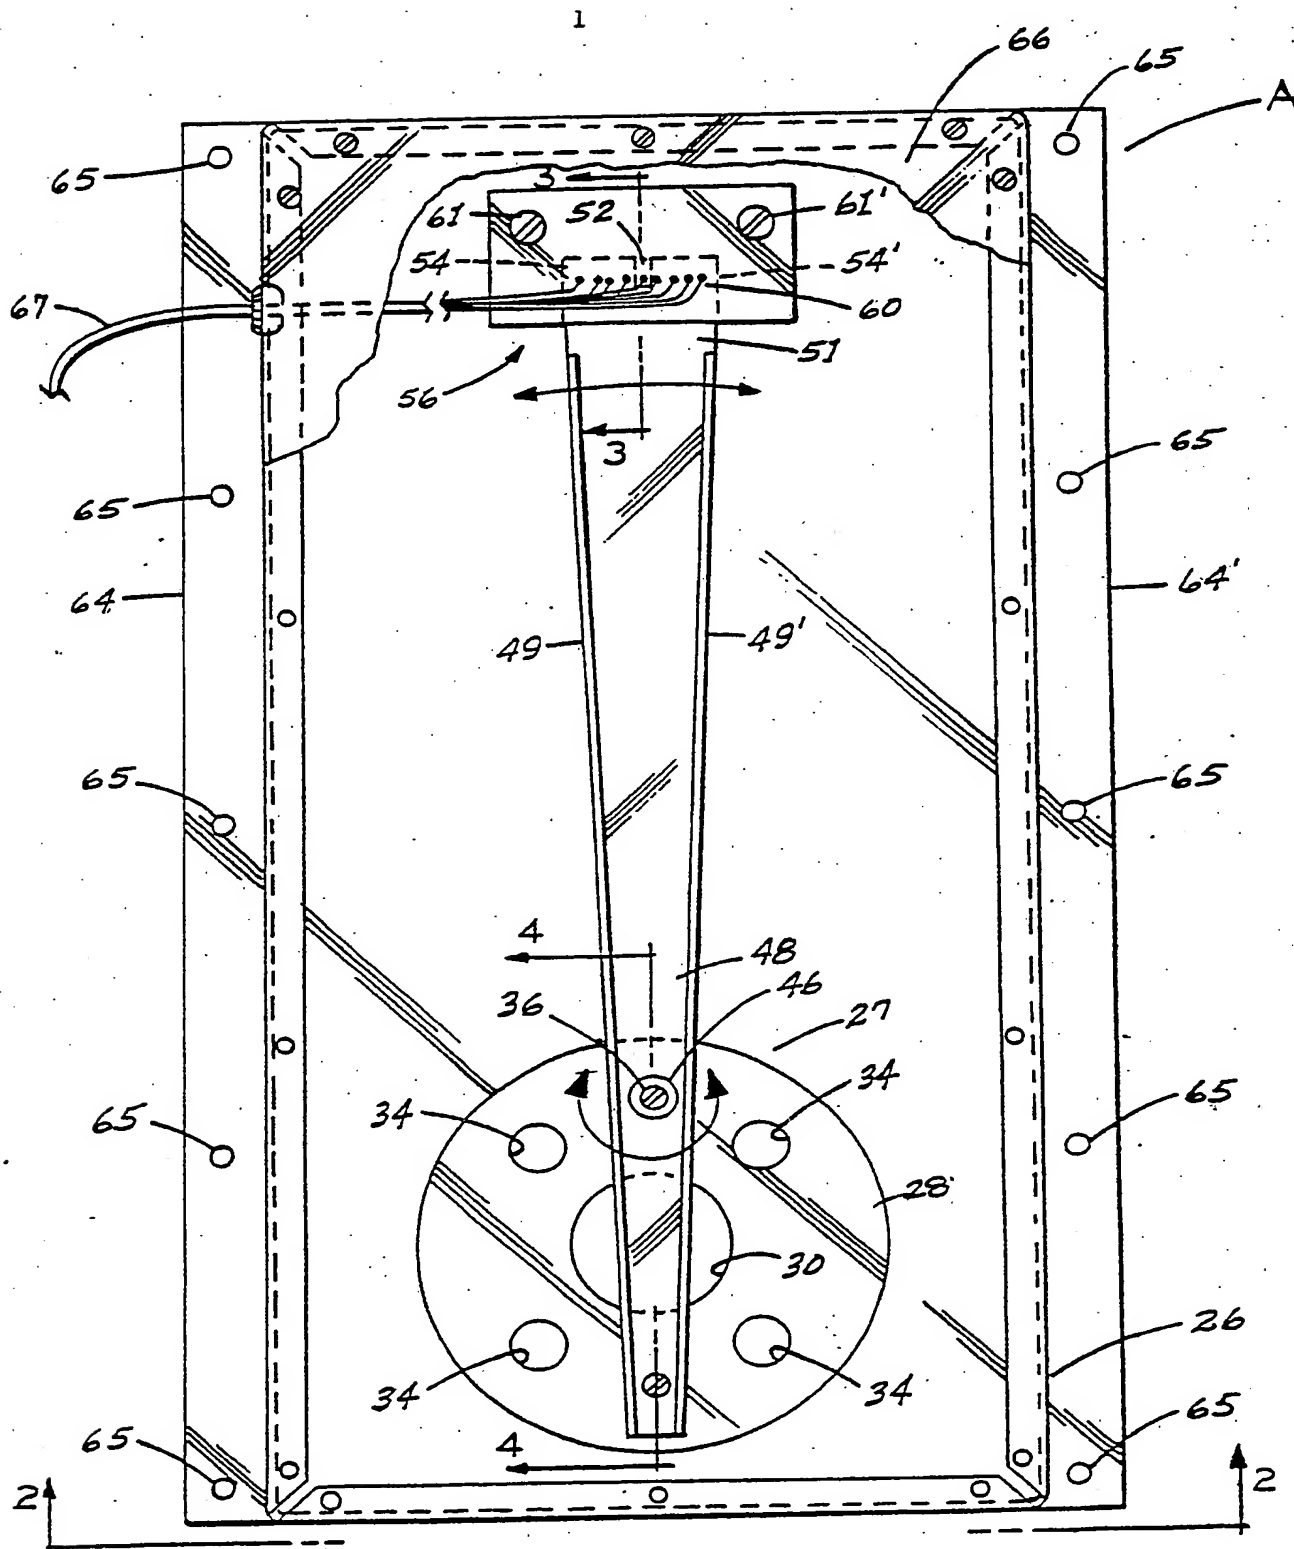


FIG. 1

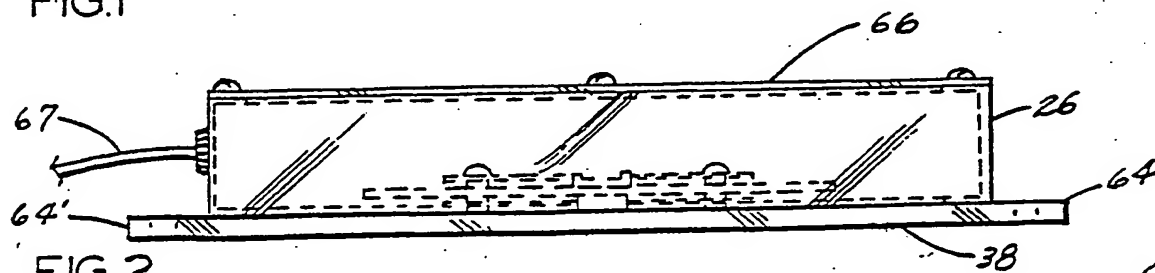
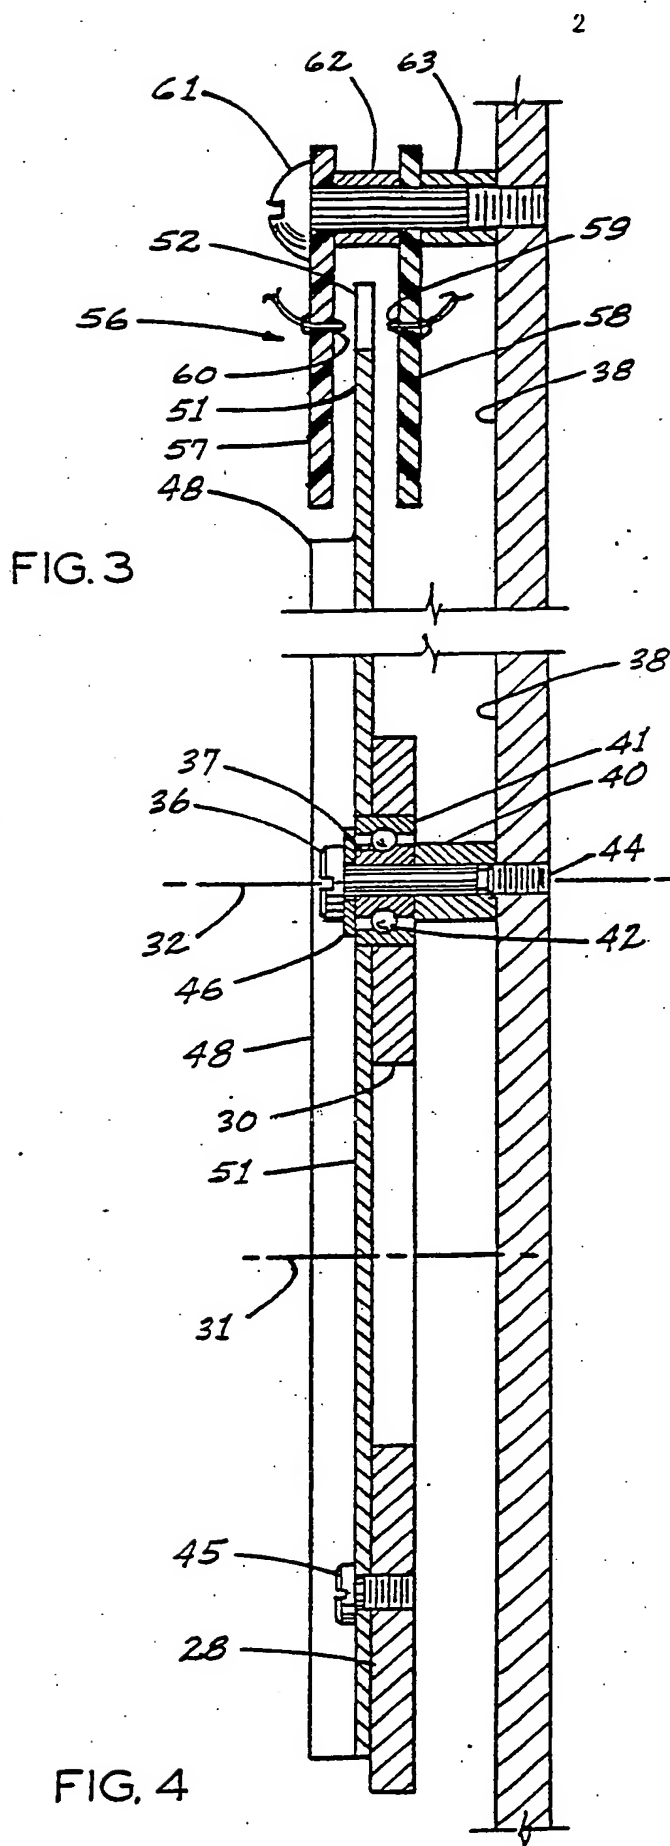


FIG. 2



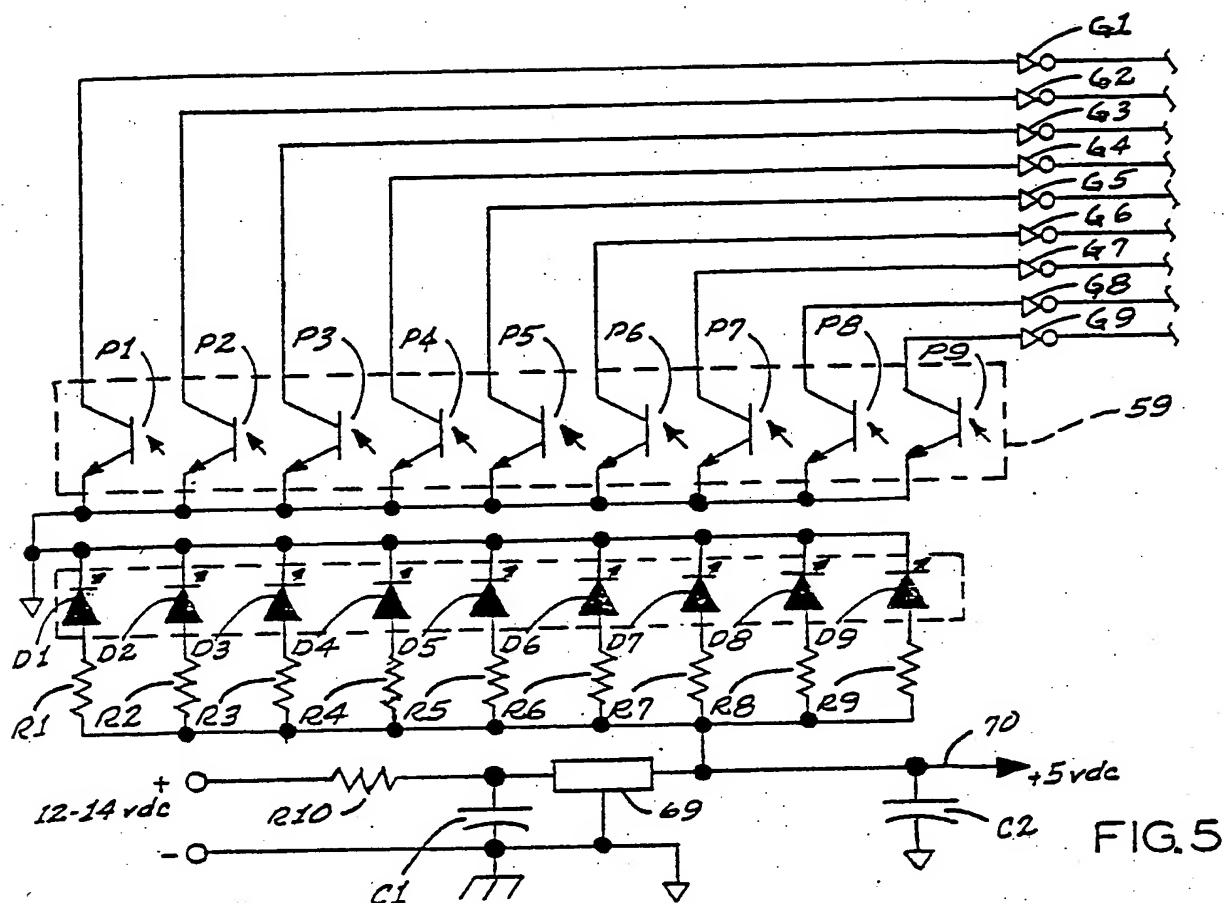


FIG. 5

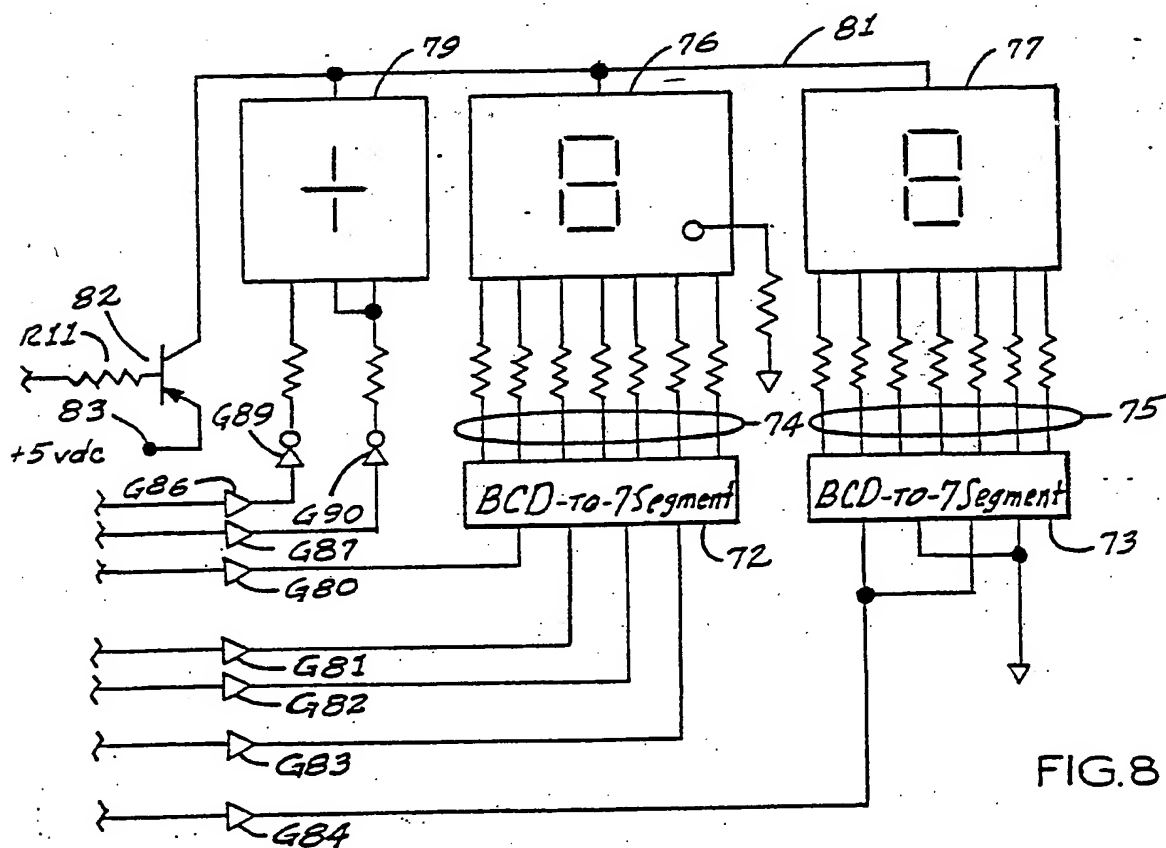
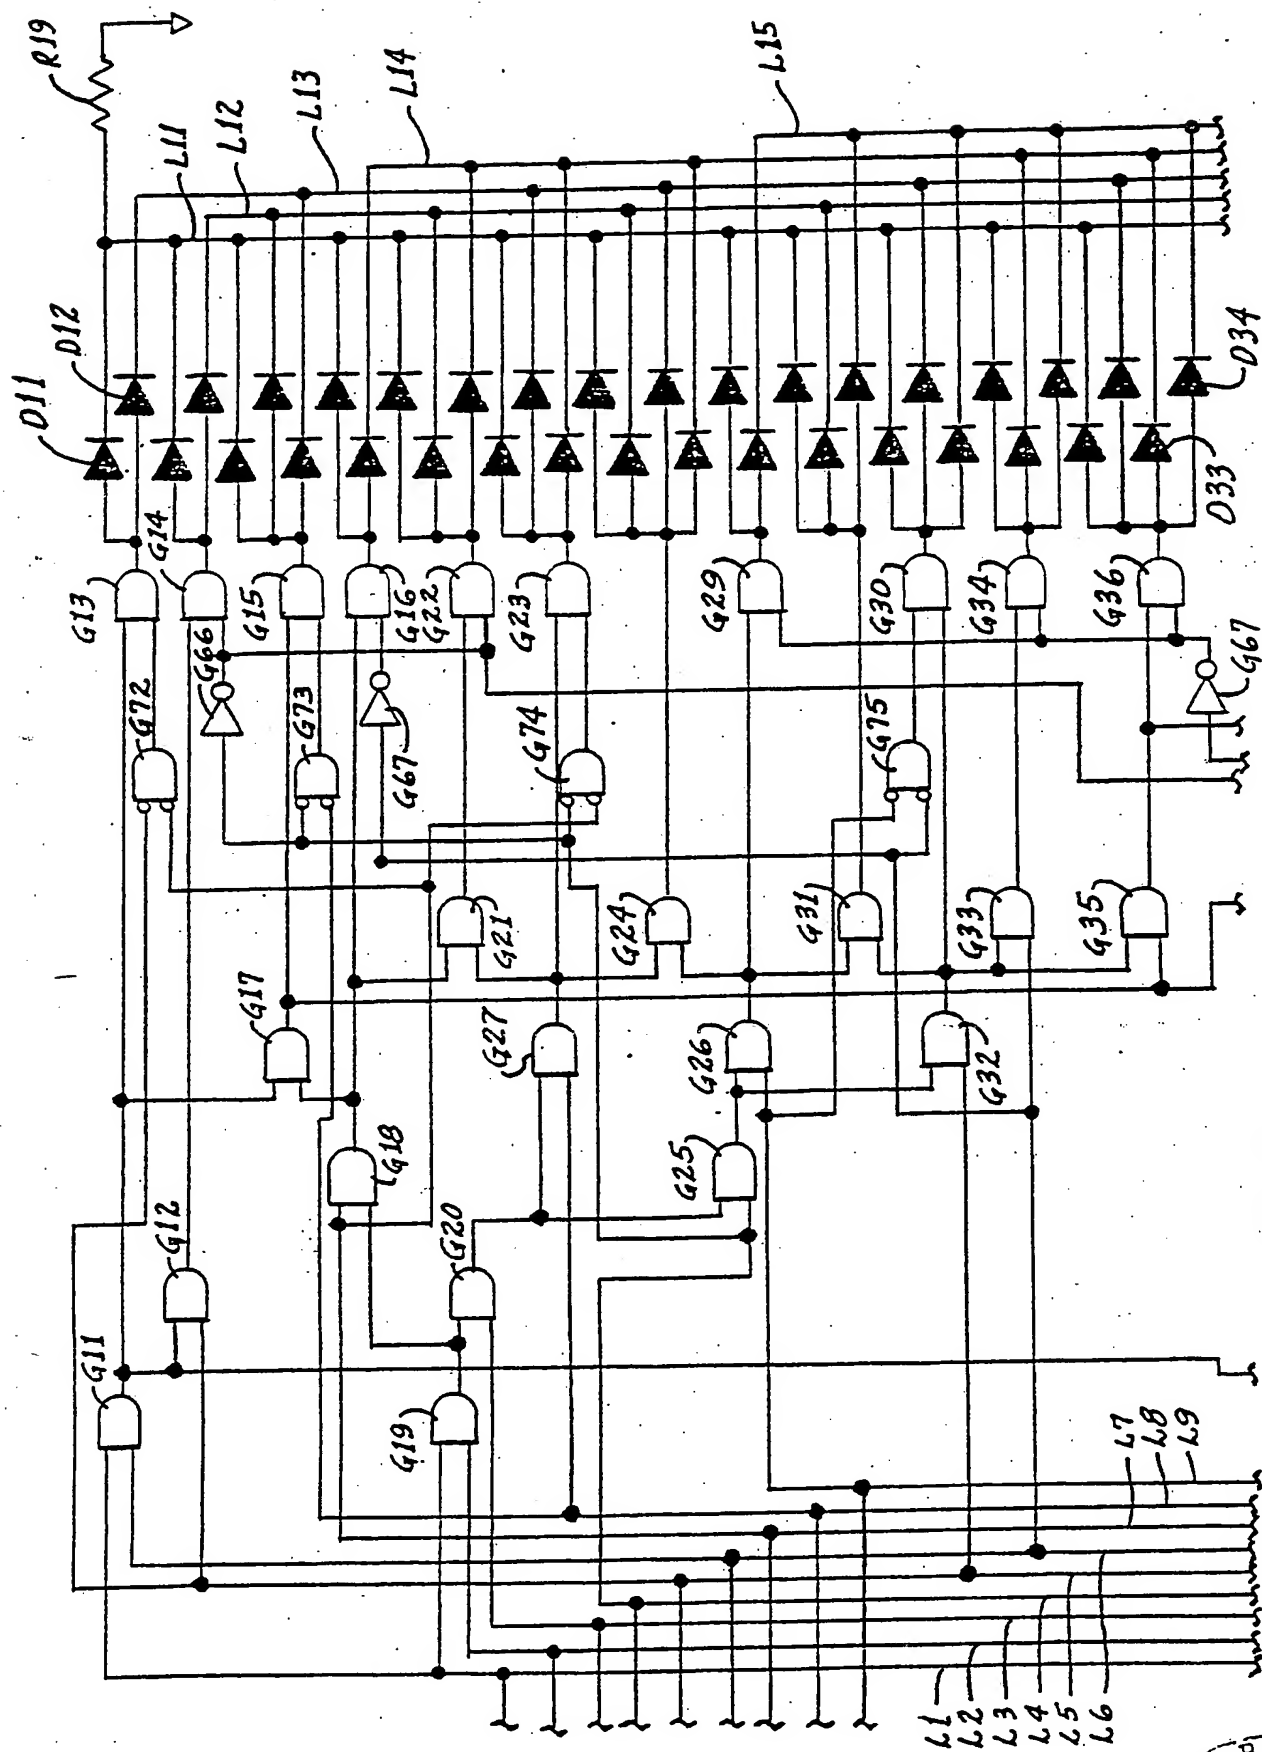
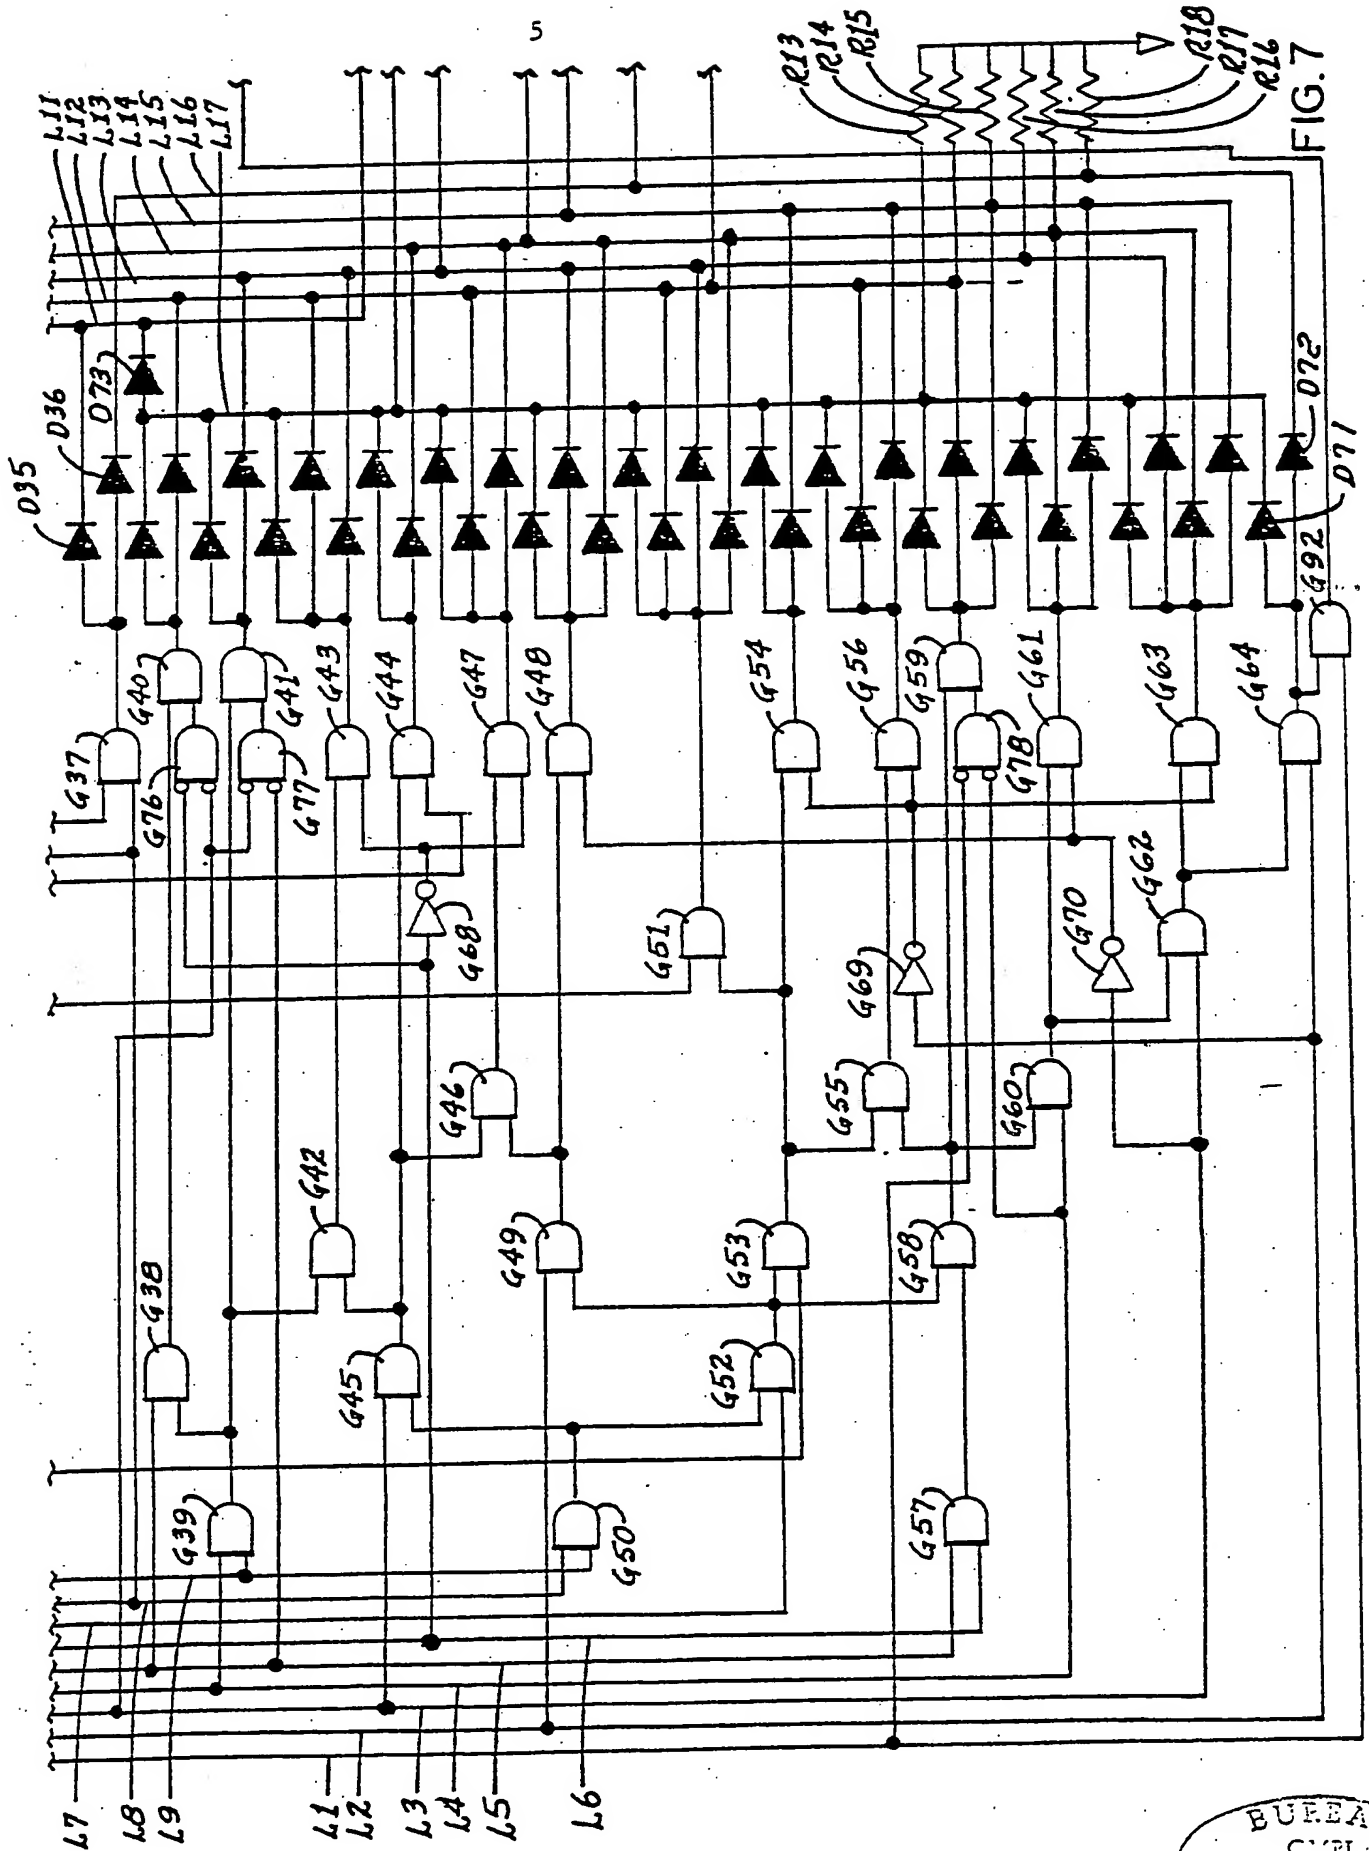


FIG. 8





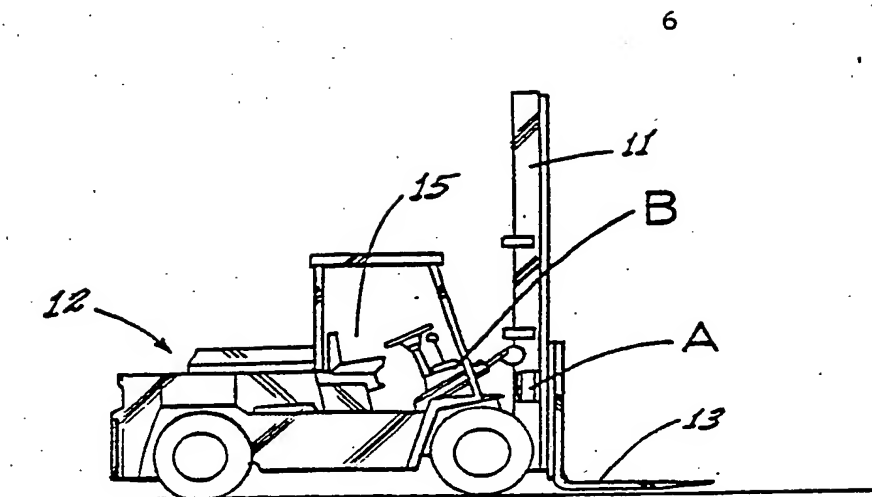


FIG. 9

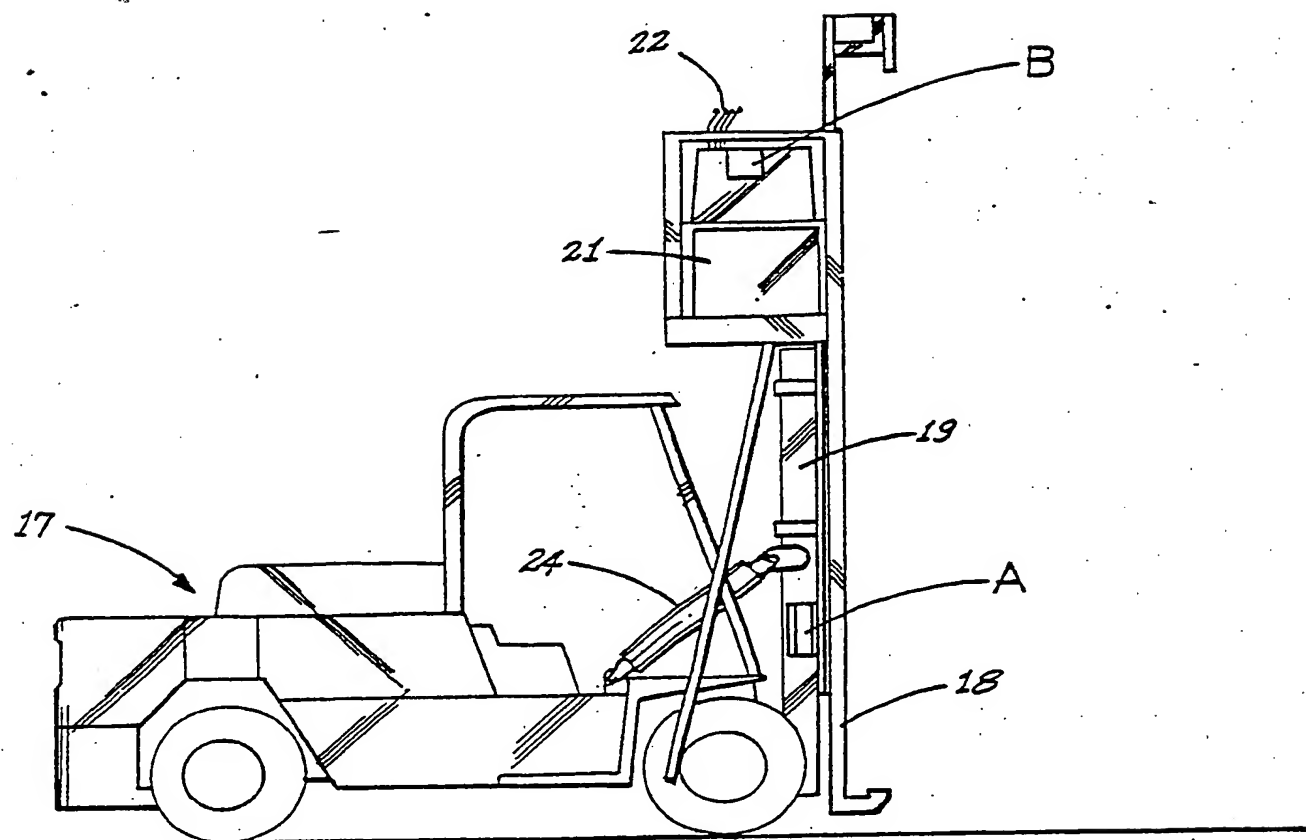


FIG. 10

INTERNATIONAL SEARCH REPORT

International Application No **PCT/US80/01470**

I. CLASSIFICATION OF SUBJECT MATTER (If several classification symbols apply, indicate all) ¹

According to International Patent Classification (IPC) or to both National Classification and IPC

INT. CL. 3 G01C 9/06

II. FIELDS SEARCHED

Minimum Documentation Searched ⁴

Classification System

Classification Symbols

U.S.

33/366

Documentation Searched other than Minimum Documentation
to the extent that such Documents are included in the Fields Searched ⁵

III. DOCUMENTS CONSIDERED TO BE RELEVANT ¹⁴

Category ⁶	Citation of Document, ¹⁶ with indication, where appropriate, of the relevant passages ¹⁷	Relevant to Claim No. ¹⁸
X	US A 4,167,818, Published September 1979 (Cantarella et al)	1-21
X	US A 4,154,000, Published May 1979 (Kramer)	1-21
X	US A 3,776,315, Published December 1973 (Gill et al)	1-21
X	US A 3,865,265, Published February 1975 (Brudi et al)	1-21

• Special categories of cited documents: ¹⁹

"A" document defining the general state of the art

"E" earlier document but published on or after the international filing date

"L" document cited for special reason other than those referred to in the other categories

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but on or after the priority date claimed

"T" later document published on or after the international filing date or priority date and not in conflict with the application, but cited to understand the principle or theory underlying the invention

"X" document of particular relevance

IV. CERTIFICATION

Date of the Actual Completion of the International Search ²

6 August 1981

Date of Mailing of this International Search Report ³

20 AUG 1981

International Searching Authority ¹

ISA/USA

Signature of Authorized Officer ²⁰

Charles E. Phillips